




## INSTRUCTION MANUAL

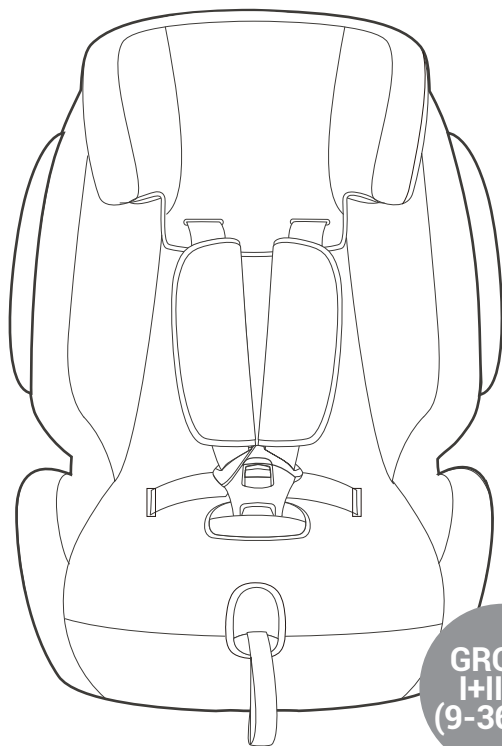

GROUP  
I+II+III  
(9-36 KG)

REF : 15051/15068

---

**IMPORTANT:  
SAVE THESE INSTRUCTIONS FOR  
FUTURE REFERENCE.**

---

Dear Customer:

Thank you for purchasing a product ASALVO. We're glad you've chosen one of our products, and we hope you are satisfied with its use. Please read the instructions carefully and keep this manual in a safe place.

If you do this, you can endanger the health of your baby. Pay special attention to the advice on cleaning and care product. So you can enjoy more time.

**IMPORTANT:**  
**save these instructions for future reference. Please read this manual carefully before using the product, do not follow these instructions, can result in safety problems for baby**

## WARNINGS

- **WARNINGS!** Before using our product, please, read the instruction manual carefully.
- **WARNINGS!** The SPORT FIX car seat is a safety device and it is only safe when used in accordance with the instruction manual.
- **WARNINGS!** The product must be only be used on a forward facing seat that is fitted with an automatic 3-point safety belt which is approved according to ECE R16 or an equivalent standard.
- **WARNINGS!** The product may be used on either the front or the back seat. However, we recommend that it is fitted on the back seat.
- **WARNINGS!** The product has been approved according to the strictest European safety standards (ECE R44/04) and is suitable for Group I (9-18 kg), Group II (15-25 kg) and Group III (22-36 kg).
- **WARNINGS!** Any alteration or addition to the device without due authorisation from ESTAR ASALVO may seriously compromise the safety of the retention system.
- **WARNINGS!** If the instructions for the correct use of the retention system are not followed carefully, baby's safety will be endangered.
- **WARNINGS!** This safety device cannot be used without its fabric covering, nor may it be replaced by any other that is not identical to the original, since it forms an integral part of the system's features.
- **WARNINGS!** Never leave your child unattended in the car.

## WARNINGS

### RECOMMENDATIONS

- Keep this instruction book for future reference.
- Make sure that any luggage or other objects inside the car that may cause damage in case of an accident are properly stored and restrained.
- SPORT FIX car seat must be appropriately fastened with safety belts even when not in use because in the case of an accident this may be sent flying causing injury to any of the occupants of the car.
- NEVER UNDER ANY CIRCUMSTANCE should you carry your baby in your arms in the car, or out of the car seat. Although it may seem strange, in case of an accident, even at only 40 km/hr the force is such that it would be completely impossible to hold onto your baby.
- Remember not to use the SPORT FIX car seat in cars with front seat air bags, unless they can be disconnected, it is recommended that you should consult with the manufacturers or the sales agent of your car.

### MAINTENANCE & CLEANING

- The car seat can be cleaned by using lukewarm water and soap. Do not use aggressive cleaners like abrasives or thinner.
- The cover should be washed by hand at a maximum temperature of 30°C. Do not put it in the dryer



## CERTIFICATION AS A CHILD SAFETY SEAT INSTALLED IN A VEHICLE

| ASALVO / SPORT FIX<br>Child Safety Seat | Tested and certified according to<br>ECE* R 44/04 |             |
|-----------------------------------------|---------------------------------------------------|-------------|
|                                         | Gruop                                             | Body Weight |
| SPORT FIX                               | I+II+III                                          | 9-36 kg.    |

The child safety seat has been designed, tested and certified according to the requirements of the European Standard for Child Safety Equipment (ECE R 44/04).

The seal of approval E (in a circle) and the approval number are located on the approval label (sticker on the child safety seat).

This approval will be invalidated if you make any modifications to the child safety seat. Only the manufacturer is permitted to make modifications to the child safety seat.

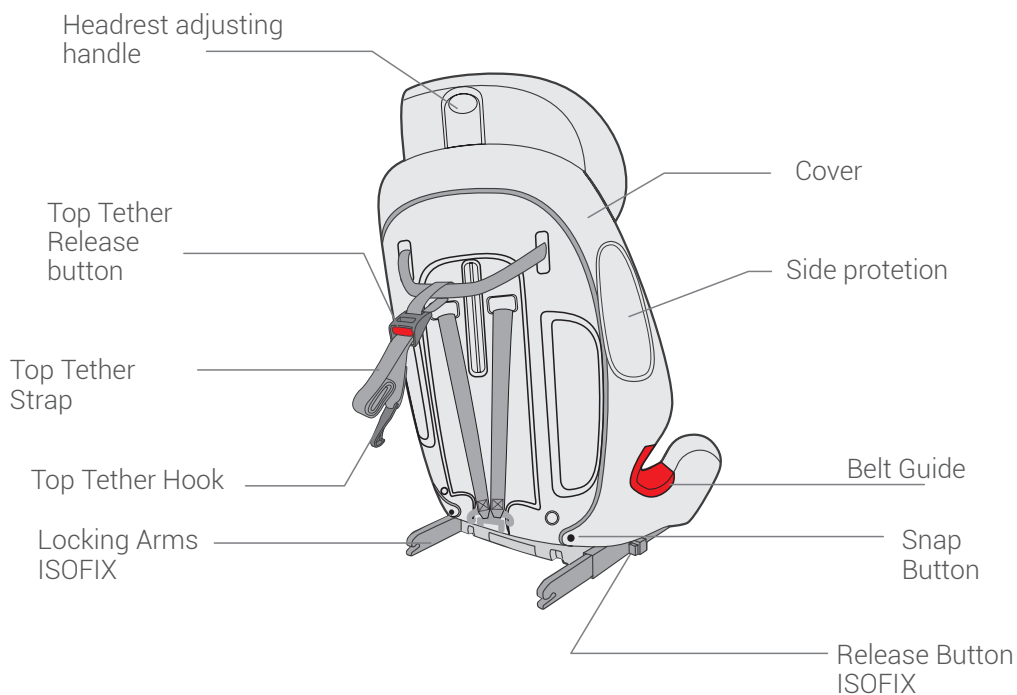
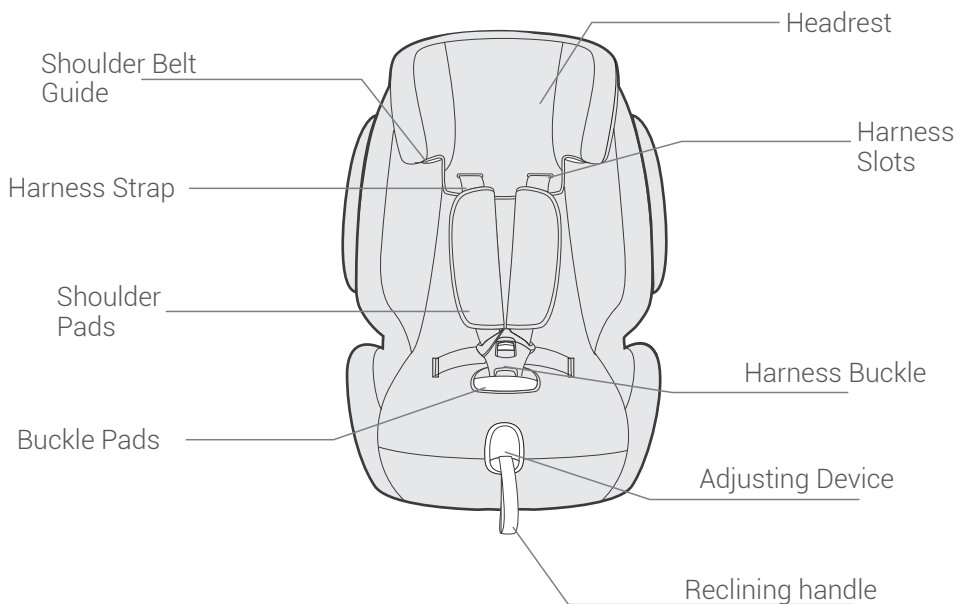


## USE IN THE VEHICLE



**DO NOT use with 2-point belt. Please install with the 3-point belt.**

Please observe the regulations applicable to your particular country. The safety belt must be approved to ECE R 16 or a comparable standard. Do not use with 2-point belt. Can be used if the vehicle seat is equipped with a 3-point belt. You can use your child car seat as follows:

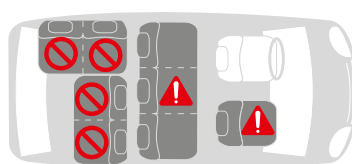

|                                                                                                                                                                                                                                                                   |     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| In the direction of travel                                                                                                                                                                                                                                        | Yes |
| Against the direction of travel                                                                                                                                                                                                                                   | NO  |
| <b>With 2-point belt</b><br>The use of a 2-point belt substantially increases the risk of injury to your child in the event of an accident.                                                                                                                       | NO  |
| <b>With 3-point belt</b><br>The safety belt must be approved to ECE R 16 or a comparable standard (see test label on belt with an "E" or "e" in a circle).                                                                                                        | Yes |
| <b>with the ISOFIX and Top Tether anchoring systems</b><br>If there is a front airbag: Slide the passenger seat a long way back and refer to any instructions in vehicle owner's manual.                                                                          | Yes |
| <b>On front passenger seat</b><br>Do not use on passenger seats with a front airbag! The front passenger seat may be used with or without ISOFIX, with the same notes as currently given for the ISOFIX ( slide the seat back and refer to vehicle instructions). | Yes |
| <b>On outer rear seat</b>                                                                                                                                                                                                                                         | Yes |
| <b>On centre rear seat</b><br>Can be used if the vehicle seat is equipped with a 3-point belt.                                                                                                                                                                    | Yes |

(Please observe the regulations applicable to your particular country).

## SECURING YOUR BABY



### IMPORTANT

The correct belt height of the shoulder belts is attained when the belt disappears into the shell slightly above the shoulder of the child.


Make sure that the shoulder belts fit properly over the shoulders of the child.

1

#### ADJUSTING THE BELTS

Loosen the harness straps by pressing the release button and pulling the harness straps as far as you can.

**Note!** Do not pull the shoulder pads.

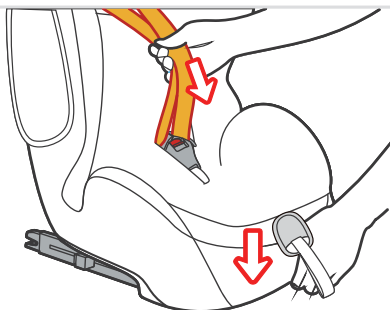



2

#### TEN HEIGHTS OF THE HEADREST

The headrest can be set at five different heights in group I mode. There are three additional positions in Group II & III mode once the shoulder pads and harness straps has been removed.

Press and pull the handle behind headrest.


It is important to make sure the headrest fit properly to head.

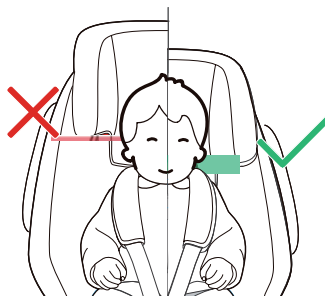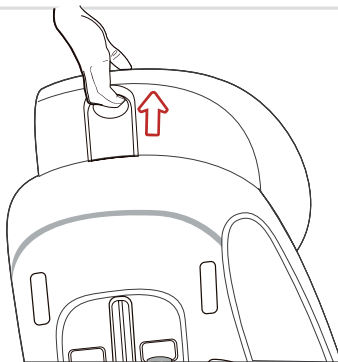

3

### TWO POSITIONS ADJUSTMENT MECHANISM

This car seat can be reclined to two different seating position by pulling adjusting board under seat base as shown in right pictures.(Only for Group I)

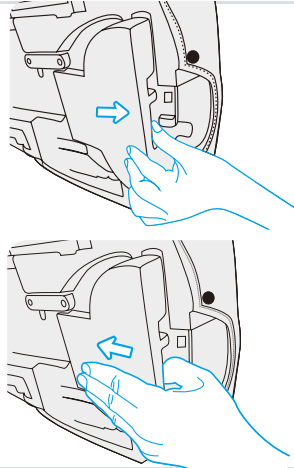

4

### SECURING YOUR BABY USING THE HARNESS


A. Loosen the harness straps by pressing the release button and pulling the harness straps as far as you can.

**Note! Do not pull the shoulder pads.**

B. Open the harness buckle, then place the harness straps to the sides of the car seat. Put the baby into the car seat.

C. The correct belt height of the shoulder pads is attained when the strap disappears into the shell slightly above the shoulder of the child.

Make sure that the harness straps fit properly over the shoulders of the child.

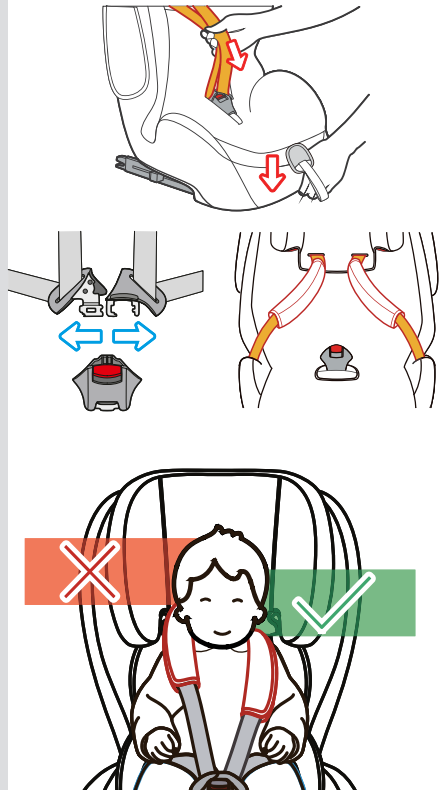


5

## SECURING YOUR BABY USING THE HARNESS

D. Slide buckle tongues together and insert them in the buckle with an audible sound "click".

E. Pull the straps tight by the harness adjustment strap, and make sure the tightness is comfortable to your kid.

**CAUTION** Do not twist or interchange the harness straps.

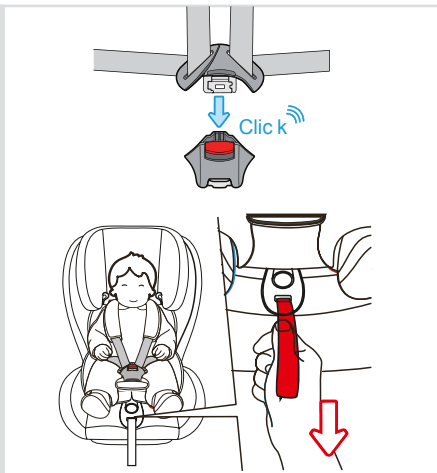

6

## TIGHTENING THE HARNESS

**CAUTION** Pull the straps end straight towards you, not upwards or downwards.


Please pay attention to the strap end. Whilst traveling (especially outside the car) it should always be attached to the cover.

Revise que su bebé vaya abrochado correctamente.

CHECKLIST TO ENSURE THAT YOUR BABY IS BUCKLE UP CORRECTLY.

**For the safety of your baby , please check that...**

- The harness straps of the car seat are comfortable but firmly fit around your child.
- The harness straps are adjusted correctly.
- The harness straps are not twisted.
- The buckle tongues are engaged in the harness buckle.

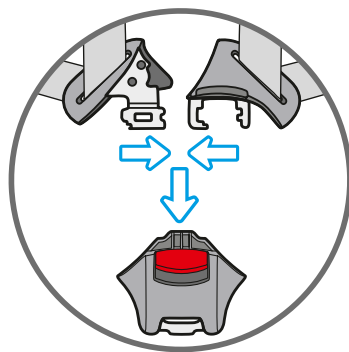

## INSTALLATION IN THE VEHICLE



**Please do not leave your child unattended in the child safety seat in the vehicle.**

### **For the protection of all vehicle occupants**

In the case of an emergency stop or an accident unsecured persons or objects may cause injury to other vehicle occupants. Please always check that...

- The backrests of the vehicle seats are locked (i.e. that a foldable rear seat bench latch is engaged).
- All heavy or sharp-edged objects in the vehicle (e.g. on the parcel shelf) are secured.
- All persons in the vehicle have their seat belts fastened.
- The child safety seat is always secured when it is in the vehicle, even if no child is being transported.

### **To protect your vehicle**

Some vehicle seat covers of sensitive materials (e.g. velour, leather, etc.) may develop wear marks when child seats are used. This can be avoided by placing a blanket or towel under the child seat.

## ISOFIX & TOP TETHER INSTALLATION

### **IMPORTANT**


First please check if there are 2 ISOFIX anchorages in the perpendicular intersection of the vehicle seat back and seat cushion, and the user-ready tether anchorage behind the vehicle seat.

**Tips:** The user-ready tether anchorage usually permanently installed on the inner rear luggage shelf or on the vehicle floor. Details you could read your vehicle guidelines or contact the vehicle manufacturer.

7

INSTALLATION OF **GROUP I**  
FOR THE CHILDREN WHOSE  
WEIGHT BETWEEN **9-18KG**  
WITH **ISOFIX AND TOP**  
**TETHER.**



A. Press the ISOFIX release button and push the ISOFIX connectors forward as far as possible.

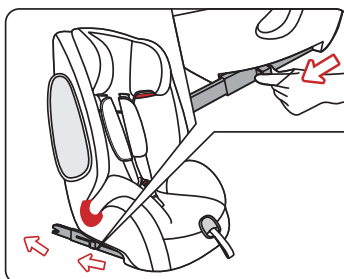

B. Push the ISOFIX connectors directly into the anchorages until heard an audible sound "click".





C. Grasp the seat body to check the seat if it is fastened tightly or shakes. If the seat shakes and the ISOFIX connectors are pulled out, please repeat the above steps and install it again.

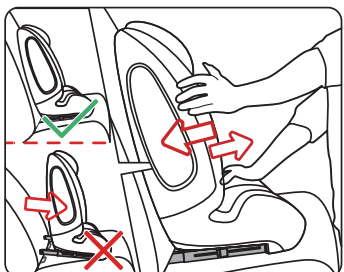
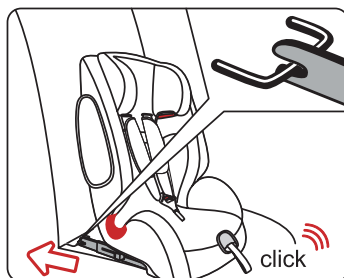


8


D. Pull out the top tether and press the tether strap release button to extend the strap until it is long enough to hook the user-ready tether anchorage behind.

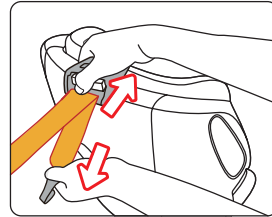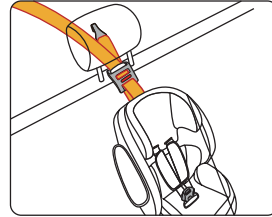

E. Hook the tether strap hook onto the user-ready anchorages. Check there maybe are 3 anchorages for the hook, please find one in your favor.



F. Pull the tether strap on another end back to tighten the top tether.

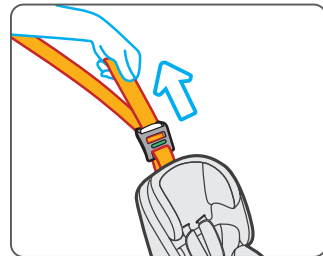

### CAUTION




If the top tether is tightened favorably and correctly, a green mark will turn up on the other end of the strap release button, please do check it.



9

**GROUP I CAR BELT  
INSTALLATION FOR  
CHILDREN'S WEIGHT  
BEWTEEN 9-18KG**

A. Pull the car belt and insert belt buckle into front side cover hole (picture 1), then across seat back and took out from the other side of cover hole (picture 2), finally buckle up until heard "click" sound. (picture 3)

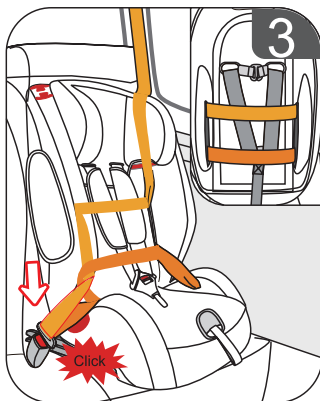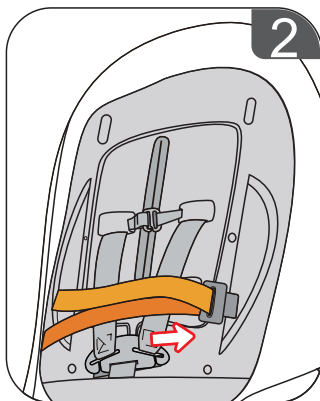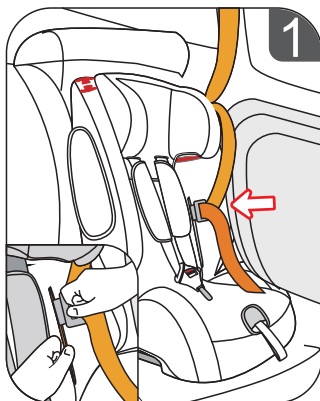




9

# **GROUP I CAR BELT** **INSTALLATION FOR** **CHILDREN'S WEIGHT** **BEWTEEN 9-18KG**

B. Please make sure car belt should be through red guide slot at the top of seat back and red waist belt guide without no twist. After installation, tighten car belt as arrow indicator direction (picture4)

C Pull the harness strap as far as you can, and open safety buckle of car seat, then put children inside 5-point harness system and joint buckle clips until heard "click" sound.(picture 5)

D. Watch your children's feeling, adjust suitable harness tightness by pulling adjusting strap and adjust headrest to right height (picture6)

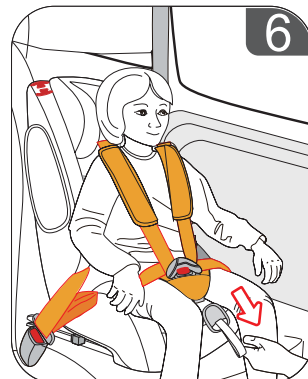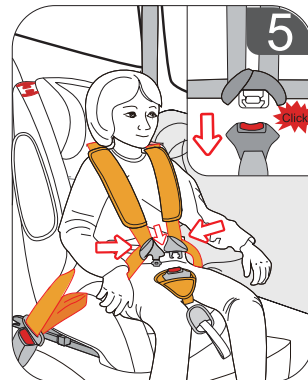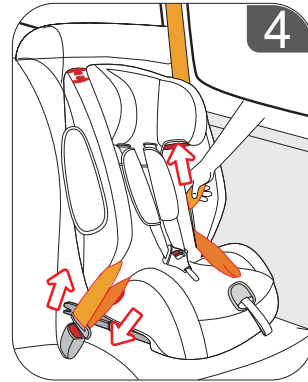

10

**GROUP II/III VEHICLE BELT**

INSTALLATION AND IT IS FOR THE CHILDREN WHOSE WEIGHT BETWEEN **15-36KG**.

Before the installation, please take away the

Harness system of baby car seat.

**Note:** The Baby insert, Harness strap, Harness

buckle, Buckle pads& Shoulder pads should be

stored away safely for future use ( see 5.1





Removing the 5-point harness system and cover ).

**WARNING** Do not to use any load bearing contact points other than those described in the instructions and marked in the child restraint. The belt must be routed as shown in the instructions.

A. Adjust the height of the headrest to suit your child.

B. Put the shoulder belt through the shoulder belt guide under the headrest.

C. Place your child on the car seat and pass the belts through the red waist belt guide. Fasten the car belt with an audible sound "click".

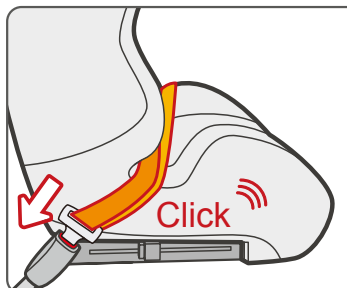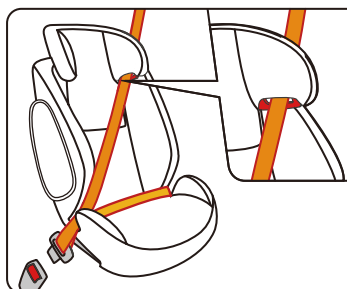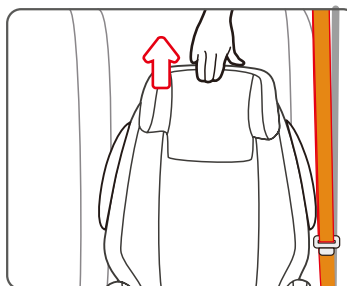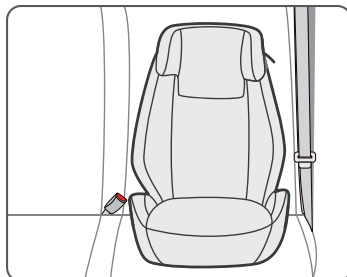

10

**GROUP II/III VEHICLE BELT**  
INSTALLATION AND IT IS  
FOR THE CHILDREN WHOSE  
WEIGHT BETWEEN **15-36KG**.

D. Make sure the Lap belt is stretched as low as possible over the child's hips , within the belt guides, and fastened into the buckle . The shoulder belt must cross midway between child's shoulder and neck.



## CARE INSTRUCTIONS

12

### REMOVING THE 5-POINT HARNESS SYSTEM AND COVER










A. Press adjusting advice and pull harness strap towards as far as you can, details see page 12. Open the cover snap button at the bottom of seat back as shown right picture.

B. Loose the harness strap and pull strap out off the strap yoke as shown in right picture.

C. Pull two harness straps out off cover slot, then separate strap with buckle metal connector.

D. After above steps, draw whole strap out from the bottom of seat. Rotate buckle clip to the shown position, then take it out from seat base.

E. Remove the 5-point harness system then remove the headrest cover and the shell cover.



# 13 REFITTING THE 5-POINT HARNESS SYSTEM AND COVER

A. After washing, place the cover on the shell.









B. Pass both sides of harness strap through strap slots at the bottom of seat. Then, lead straps through buckle metal connector

C. Pass buckle clip through buckle pads and put clip into bottom slot, then rotate it to shown position in right picture.

D. Pass harness straps through shoulder pads and insert them into harness slots, then connect the end of strap with metal connectors.

E. Also pass the end of the shoulder pads strap through the harness strap slot and shell, then fix into the strap yoke. Make sure the seat straps can not be rotated.

F. Close the buckle, then fasten the cover all around. Close the snap buttons on the back. Check that it works!

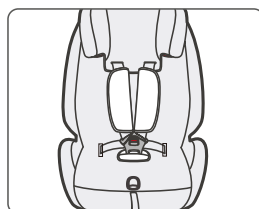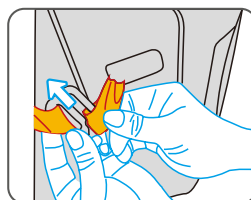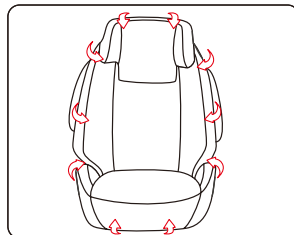



*Thank you*

FOR PURCHASING  
ASALVO PRODUCT.



[www.asalvo.com](http://www.asalvo.com)

Follow us



Imported by Estar Asalvo S.L.

CIF B91234286

C/1, PI Fridex · 41500 · Alcalá de Guadaira · Sevilla · Tfno. 902 360 516

Fax: 955 631 205 · email: [info@asalvo.com](mailto:info@asalvo.com)

[www.asalvo.com](http://www.asalvo.com)